

# MOLYBKOMBIN M 5 SPRAY

Solid lubricant suspension in mineral oil, spray form



Product data	MOLYBKOMBIN M 5 Spray
Article number	081026
Chemical composition, type of oil	mineral oil
Chemical composition, solid lubricant	molybdenum disulphide
Chemical composition, solvent	hydrocarbon
Chemical composition, propellant	propane-butane
Lower service temperature	-5 °C / 23 °F
Upper service temperature	120 °C / 248 °F
Colour space	black
Texture	liquid
Evaporation loss, t=3h, T=100°C, weighed portion 10 g, recirculating air drying cabinet, dish d~10cm	approx. 25 % by weight
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	24 months


## Material safety data sheets

Material safety data sheets can be requested via our website [www.klueber.com](http://www.klueber.com). You may also obtain them through your contact person at Klüber Lubrication.



# MOLYBKOMBIN M 5 SPRAY

Solid lubricant suspension in mineral oil, spray form

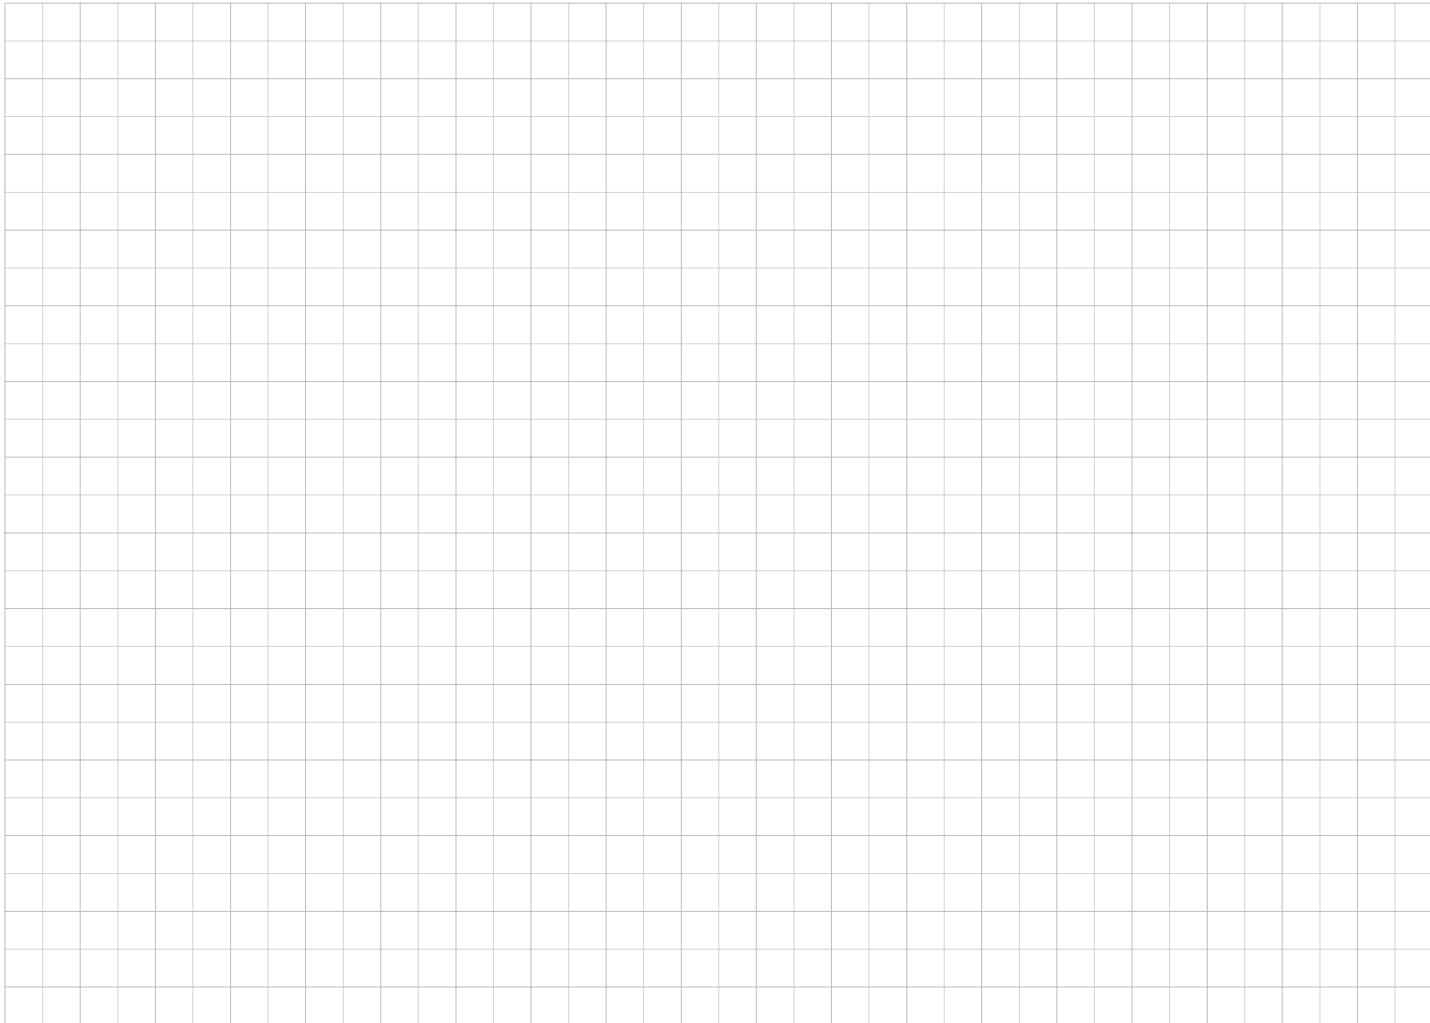

---

## Klüber Lubrication – your global specialist

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 80 years.

**Klüber Lubrication München SE & Co. KG /  
Geisenhausenerstraße 7 / 81379 München / Germany /  
phone +49 89 7876-0 / fax +49 89 7876-333.**

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München SE & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München SE & Co. KG and if source is indicated and voucher copy is forwarded.